


ZOLTRIX, INC.

FM-VOC336I

Card Type	Modem, Fax
Chip Set	Rockwell
I/O Options	Line in, line out, speaker out, microphone in
Maximum Modem Rate	33.6Kbps
Maximum Fax Rate	14.4Kbps
Data Modulation Protocol	Bell 103/212A
	ITU-T V.21, V.22, V.22bis, V.32, V.32bis, V.34, V.34+
Fax Modulation Protocol	ITU-T V.17, V.27ter, V.29
Error Correction/Compression	MNP5, V.42, V.42bis
Fax Class	Class I & II
Data Bus	8-bit ISA
Card Size	Half-length, full-height card

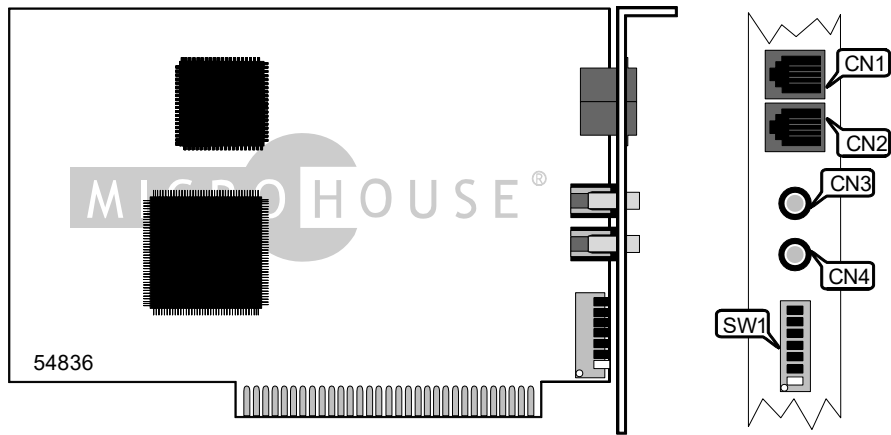

CONNECTIONS			
Function	Label	Function	Label
Line out	CN1	Microphone in	CN3
Line in	CN2	Speaker out	CN4

SERIAL PORT ADDRESS		
Setting	SW1/5	SW1/6
COM1 (3F8h)	On	On
COM2 (2F8h)	Off	On
COM3 (3E8h)	On	Off
COM4 (2E8h)	Off	Off

INTERRUPT					
IRQ	SW1/1	SW1/2	SW1/3	SW1/4	SW1/7
2	Off	Off	Off	Off	On
3	Off	Off	Off	On	Off
4	Off	Off	On	Off	Off
5	Off	On	Off	Off	Off
7	On	Off	Off	Off	Off

Continued on next page...

SUPPORTED COMMAND SET	
Basic AT Commands	
AT, '+++', 'comma', A/	
A, B, C, D, E, F, H, I, L, M, N, O, P, Q, T, V, W, X, Y, Z	
&C, &D, &F, &G, &J, &K, &L, &M, &P, &Q, &R, &S, &T, &V, &W, &X, &Y, &Z	
Extended AT Commands	
\A, \B, \G, \K, \L, \N	
%C, %E, %L, %Q	
S Registers	
S0, S1, S2, S3, S4, S5, S6, S7, S8, S9, S10, S11, S12, S14, S16, S18, S21, S22, S23, S25, S26, S27, S29, S30, S31, S32, S33, S36, S37, S38, S39, S40, S41, S46, S48, S82, S86, S95	
Special Commands	
Note: See MHI Help File for full command documentation.	