


QUADRAM QUADBOARD

Card Type	Multi-I/O card
Chip Set	Unidentified
Maximum Onboard Memory	384KB DRAM
I/O Options	Game port, parallel port, serial port
Data Bus	8-bit ISA
Floppy drives supported	None

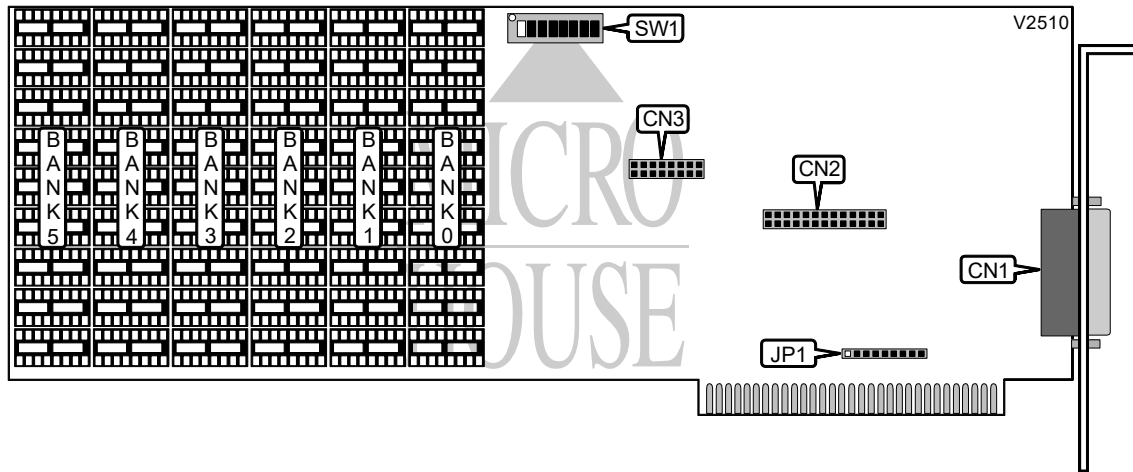

CONNECTIONS			
Function	Label	Function	Label
Serial port	CN1	Game port	CN3
Parallel port	CN2		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
Game port enabled	SW 1/1	On	
Game port disabled	SW 1/1	Off	
Clock/calendar enabled	SW 1/2	On	
Clock/calendar disabled	SW 1/2	Off	
Parity enabled	SW 1/3	On	
Parity disabled	SW 1/3	Off	
Quadboard memory enabled	SW 1/4	On	
Quadboard memory disabled	SW 1/4	Off	

DRAM CONFIGURATION						
Size	Bank 0	Bank 1	Bank 2	Bank 3	Bank 4	Bank 5
64KB	(9) 4164K	None	None	None	None	None
128KB	(9) 4164K	(9) 4164K	None	None	None	None
192KB	(9) 4164K	(9) 4164K	(9) 4164K	None	None	None
256KB	(9) 4164K	(9) 4164K	(9) 4164K	(9) 4164K	None	None
320KB	(9) 4164K	(9) 4164K	(9) 4164K	(9) 4164K	(9) 4164K	None
384KB	(9) 4164K	(9) 4164K	(9) 4164K	(9) 4164K	(9) 4164K	(9) 4164K

Continued on next page. . .

QUADRAM QUADBOARD

... continued from previous page

DRAM SWITCH CONFIGURATION				
Size	SW1/5	SW1/6	SW1/7	SW1/8
64KB	On	On	On	Off
128KB	On	On	Off	On
192KB	On	On	Off	Off
256KB	On	Off	On	On
320KB	On	Off	On	Off
384KB	On	Off	Off	On
448KB	On	Off	Off	Off
512KB	Off	On	On	On
576KB	Off	On	On	Off
640KB	Off	On	Off	On
704KB	Off	On	Off	Off
768KB	Off	Off	On	On
832KB	Off	Off	On	Off
896KB	Off	Off	Off	On
960KB	Off	Off	Off	Off

PARALLEL PORT ADDRESS SELECTION	
Setting	JP1
LPT1 (378h)	Pins 1 & 2 closed
LPT2 (278h)	Pins 2 & 3 closed

SERIAL PORT ADDRESS SELECTION	
Setting	JP1
COM1 (3F8h)	Pins 5 & 6 closed
COM2 (2F8h)	Pins 4 & 5 closed

SERIAL PORT INTERRUPT SELECTION	
IRQ	JP1
IRQ4	Pins 7 & 8 closed
IRQ3	Pins 8 & 9 closed